



# Series RF-DBJ **Jacket Style Duckbill Check Valve**

Cla-Val Series DBJ Duckbill Jacket Style Check Valves feature all-metal enclosures for installation in pipelines as a whisper quiet, non-slamming, low-maintenance, low pressuredrop check valve. A variety of elastomers allow DBJ valves to be used with many different fluids. When ordering, specify Model DBJ, nominal pipe, flange drilling, and add first letter of elastomer material IE: 4"-DBJ-N (N for Neoprene)





## Note 1:


Dimensions are for clearance purposes only. Actual product dimensions may vary based upon specific application requirements.



Larger sizes are available, contact local office for pricing.



Size ID	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24
F/F	4 1/2	5 1/2	6 1/2	8 1/2	9 1/2	11 1/4	11 3/4	15 3/4	19	21	23	25	29	33	38	41 1/2	49 1/2
н	4 1/4	4 5/8	5	7 1/8	7 1/2	8 1/8	10 5/8	11 1/2	13 1/2	18	22 3/8	25	27 1/2	29	32 5/8	36 1/2	47
w	5 3/4	6 1/4	6 1/2	8 1/2	9	10	11 3/4	11 3/4	15 1/4	17 1/2	19 3/8	22 1/2	24	25	28 1/4	29	37 1/2
Wt. Lbs	9	11	17	32	40	51	88	137	180	257	440	640	790	930	1285	1714	2110

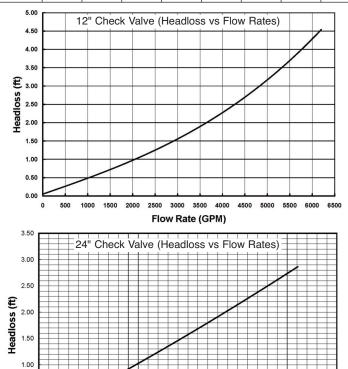

# Elastomer Selection Guide

## **Ethylene Propylene Rubber**

Most effective for applications involving waste or diluted acids.

# Viton™

Resists solvents, halogenated hydrocarbons, oxygen, weather, ozone, oils and chemicals. Buna N<sup>®</sup>

Resistant to kerosene, moderate chemicals, fats, oils, grease and many hydrocarbons.

# **Natural Rubber**

Good abrasion resistance, tensile strength and resiliency. Also suitable for applications with organic acids, alcohols, ketones and most moderate chemicals.

## Hypalon™

Resists strong acids and bases, ozone, weathering, heat and oxidizing chemicals. Butyl

Good resistance to animal, vegetable fats, strong oxidizing chemicals, oils, heat and greases.

## Neoprene

General resistant to oil, grease, moderate chemicals, fats, hydrocarbons, ozone. and barnacle growth.

Order Information	Flow Rate (gpm)	Line Pressure	Back Pressure
Minimum			
Maximum			



0

5000

10000

15000

Flow Rate (gpm)

20000

25000

30000

0.50 0.00

> 1701 Placentia Ave • Costa Mesa CA 92627 • Phone: 949-722-4800 • Fax: 949-548-5441 • E-mail: info@cla-val.com • www.cla-val.com © Copyright Cla-Val 2018 • Printed in USA • Specifications subject to change without notice. E-DBJ (R-10/2018)

Sample Flow Rate vs

Headloss Graphs.

Other size charts available

upon request.

Based on flow testing at

Utah State University.